

MD485-USB 转换器模块说明书

USB to RS-485 Converter
Baud rate 75 - 1,228,800 bps



玺瑞股份有限公司

403台中市中港路一段12号12楼

电话： +886-4-2207-8888

传真： 886-4-2207-9999

电子信箱： service@syris.com

网站： <http://www.syris.com>

Ver:0211

MD485-USB 转换器模块说明书

USB to RS-485 Converter
Baud rate 75 - 1,228,800 bps



玺瑞股份有限公司

403台中市中港路一段12号12楼

电话：+886-4-2207-8888


传真：886-4-2207-9999

电子信箱：service@syris.com

网站：<http://www.syris.com>

Ver:0211

MD485-USB 接线图

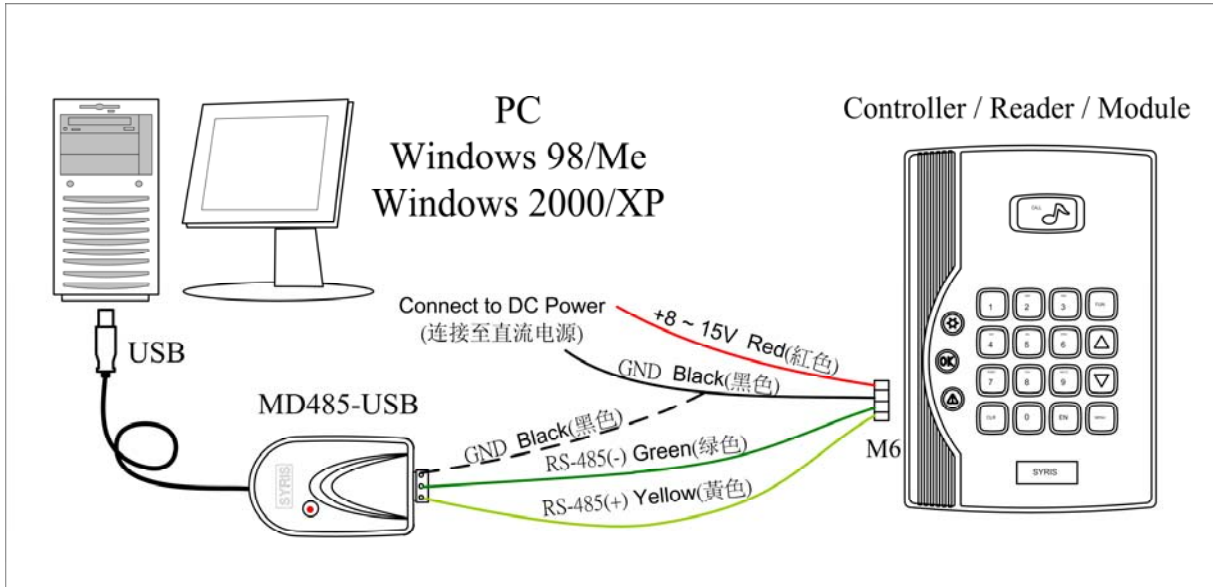


* 安装时电源必须共地

MD485-USB规格:

Items / Specs	MD485-USB
PC 通讯接口	USB V1.1
RS-485 串口	3 PIN terminal blocks
通信速率	19,200 bps (75~1,228,800) auto
Stop bits	1 , 1.5 , 2
Parity type	None , Event , Odd , Mark , Space
Data bits	5 , 6 , 7 , 8 or 16
USB 联机距离	1.9 m
状态显示	1 LED
颜色	Ivory
工作温度	-20℃ to 70℃
储存温度	-30℃ to 80℃
输入电压	USB 5V / 100mA
尺寸(mm)	46.5W x 76H x 17D

* This specification is preliminary and is subject to change without prior notice.

MD485-USB 接线图

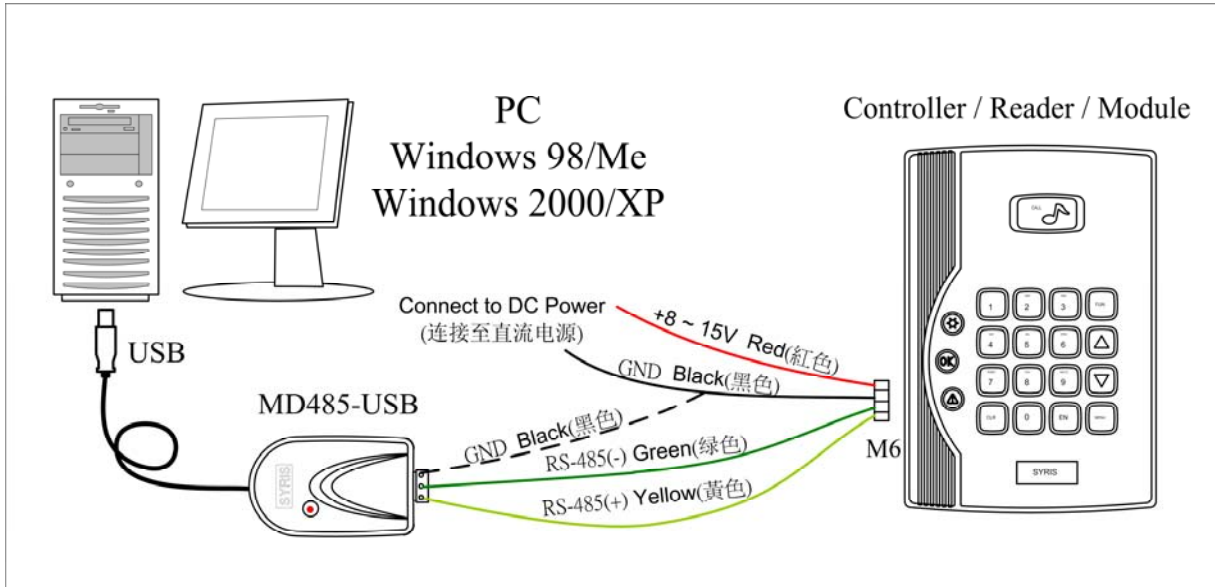

* 安装时电源必须共地

MD485-USB规格:

Items / Specs	MD485-USB
PC 通讯接口	USB V1.1
RS-485 串口	3 PIN terminal blocks
通信速率	19,200 bps (75~1,228,800) auto
Stop bits	1 , 1.5 , 2
Parity type	None , Event , Odd , Mark , Space
Data bits	5 , 6 , 7 , 8 or 16
USB 联机距离	1.9 m
状态显示	1 LED
颜色	Ivory
工作温度	-20℃ to 70℃
储存温度	-30℃ to 80℃
输入电压	USB 5V / 100mA
尺寸(mm)	46.5W x 76H x 17D

* This specification is preliminary and is subject to change without prior notice.