

# SYRDK5

## Keypad Proximity / Mifare Reader


### Feature

- 3 LED status indicators.
- Built-in Anti-Tamper protection.
- Built-in Buzzer.
- Communication : Wiegand / RS485.
- Built-in Watchdog to prevent system from halting.
- Access mode :  
Card / Card+Pin / Pin.



### Specification

Specs / Item	SYRDK5	SYRDK5 -M1	SYRDK5 -MIC
Transmit Frequency	125KHz(EM)	13.56MHz(Mifare/i-Code)	
Read Range	5~15cm	2~6cm	
Baud Rate	19,200 bps (4,800~115,200 bps)		
Card Compatibility	EM	Mifare	Mifare/i-Code
Card Read Time	0.1 sec		
Keypad	17 keys		
LED Indicator	3 LED		
Communication	RS485 , Wiegand		
ID	1~8 (SYW95A) / 01~99 (SYSOFT-95A)		
Anti-Tamper Facility	Built-in		
Beep Tone	Built-in Buzzer		
Operating Temperature	-20°C ~ +70°C		
Input Voltage	8V~15V DC / 0.5~2W		
Dimensions (W x H x D)	83 x 121 x 32 mm		

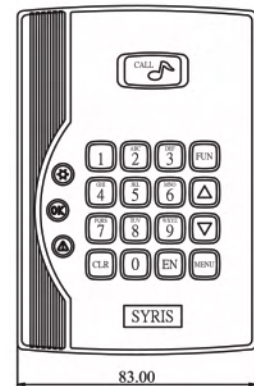

### Ordering Information

Item	Type
■ SYRDK5	Keypad Reader-EM
■ SYRDK5-M1	Keypad Reader-Mifare
■ SYRDK5-MIC	Keypad Reader-Mifare/i-code

Copyright © 2012 SYRIS Technology Corp.

❖ This specification is preliminary and subject to change without prior notice.