

# Install and Operation Instructions MD485-USB Module

USB to RS-485 Converter  
Baud rate 75 - 1,228,800 bps



## **SYRIS Technology Corp.**

ADD : 12F, No. 12, Sec. 1, Taijunggang Rd.

Taichung, Taiwan (403)

TEL : +886-4-2207-8888

FAX : +886-4-2207-9999

E-Mail : [service@syris.com](mailto:service@syris.com)

Website : <http://www.syris.com>

# Install and Operation Instructions MD485-USB Module

USB to RS-485 Converter  
Baud rate 75 - 1,228,800 bps



## **SYRIS Technology Corp.**

ADD : 12F, No. 12, Sec. 1, Taijunggang Rd.

Taichung, Taiwan (403)


TEL : +886-4-2207-8888

FAX : +886-4-2207-9999

E-Mail : [service@syris.com](mailto:service@syris.com)

Website : <http://www.syris.com>

# MD485-USB WIRING DIAGRAM

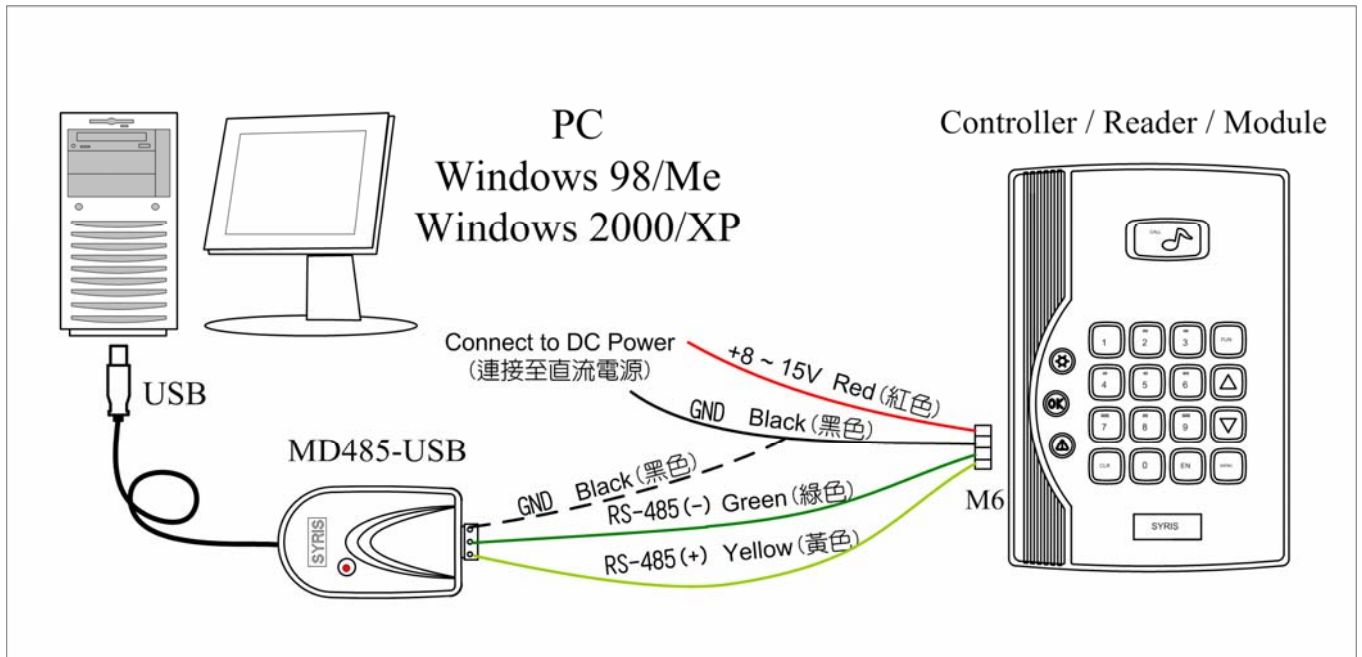


## MD485-USB Specification

Items / Specs	MD485-USB
PC Interface	USB V1.1
RS-485 connector type	3 PIN terminal blocks
Baud rate	19,200 bps (75~1,228,800) auto
Stop bits	1 , 1.5 , 2
Parity type	None , Event , Odd , Mark , Space
Data bits	5 , 6 , 7 , 8 or 16
USB line length	1.9 m
Indicator	1 LED
Color	Ivory
Operating temperature	-20°C to 70°C
Storage temperature	-30°C to 80°C
Power supply input	USB 5V / 100mA
Dimensions (mm)	46.5W x 76H x 17D

\* This specification is preliminary and is subject to change without prior notice.

# MD485-USB WIRING DIAGRAM

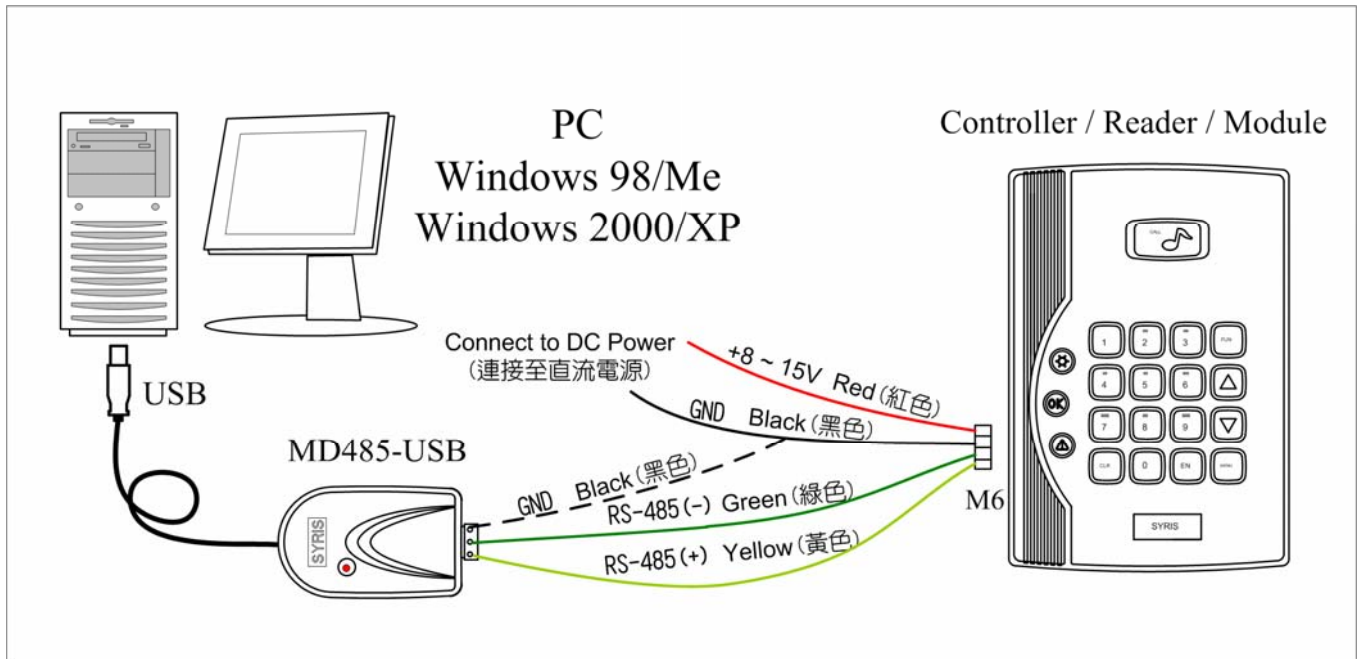

## MD485-USB Specification

Items / Specs	MD485-USB
PC Interface	USB V1.1
RS-485 connector type	3 PIN terminal blocks
Baud rate	19,200 bps (75~1,228,800) auto
Stop bits	1 , 1.5 , 2
Parity type	None , Event , Odd , Mark , Space
Data bits	5 , 6 , 7 , 8 or 16
USB line length	1.9 m
Indicator	1 LED
Color	Ivory
Operating temperature	-20°C to 70°C
Storage temperature	-30°C to 80°C
Power supply input	USB 5V / 100mA
Dimensions (mm)	46.5W x 76H x 17D

\* This specification is preliminary and is subject to change without prior notice.