


# Install and Operation Instructions MDDIDO-16 Module

16 Relay output / 16 Voltage free input  
RS-485 Interface  
Baud rate 4,800-115,200 bps

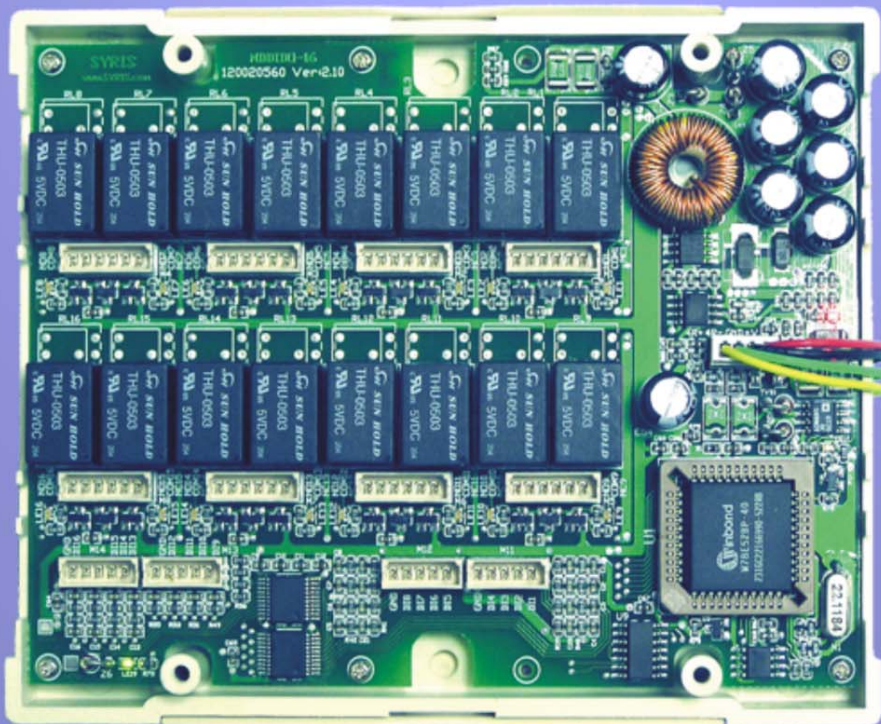

## **SYRIS Technology Corp.**

ADD : 12F, No. 12, Sec. 1, Taijunggang Rd.

Taichung, Taiwan (403)

TEL : +886-4-2207-8888


FAX : +886-4-2207-9999

E-Mail : [service@syris.com](mailto:service@syris.com)

Website : <http://www.syris.com>

# Install and Operation Instructions MDDIDO-16 Module

16 Relay output / 16 Voltage free input  
RS-485 Interface  
Baud rate 4,800-115,200 bps

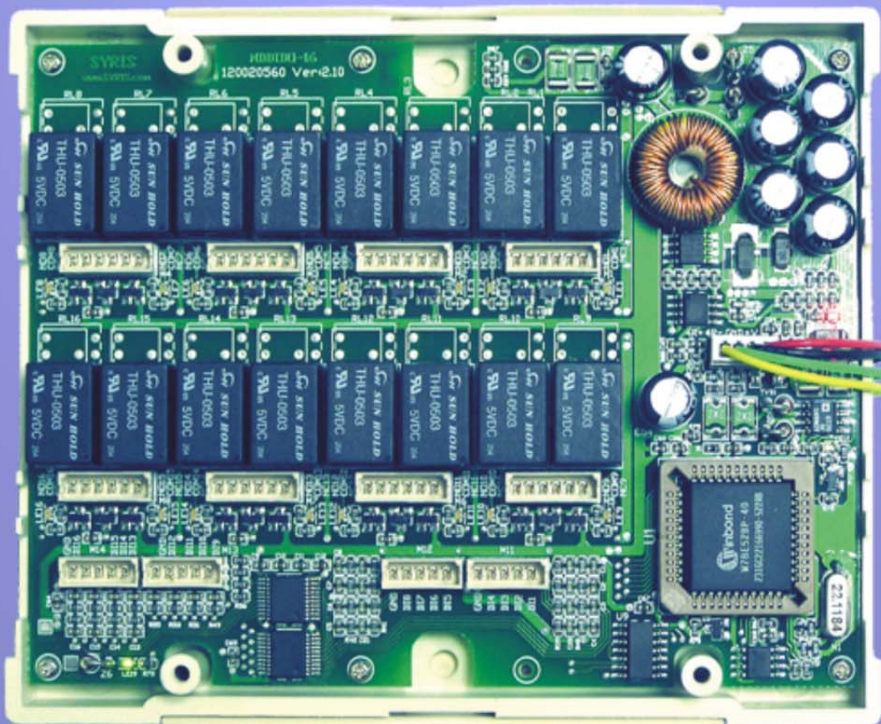

## **SYRIS Technology Corp.**

ADD : 12F, No. 12, Sec. 1, Taijunggang Rd.

Taichung, Taiwan (403)


TEL : +886-4-2207-8888

FAX : +886-4-2207-9999

E-Mail : [service@syris.com](mailto:service@syris.com)

Website : <http://www.syris.com>

# MDDIDO-16 WIRING DIAGRAM

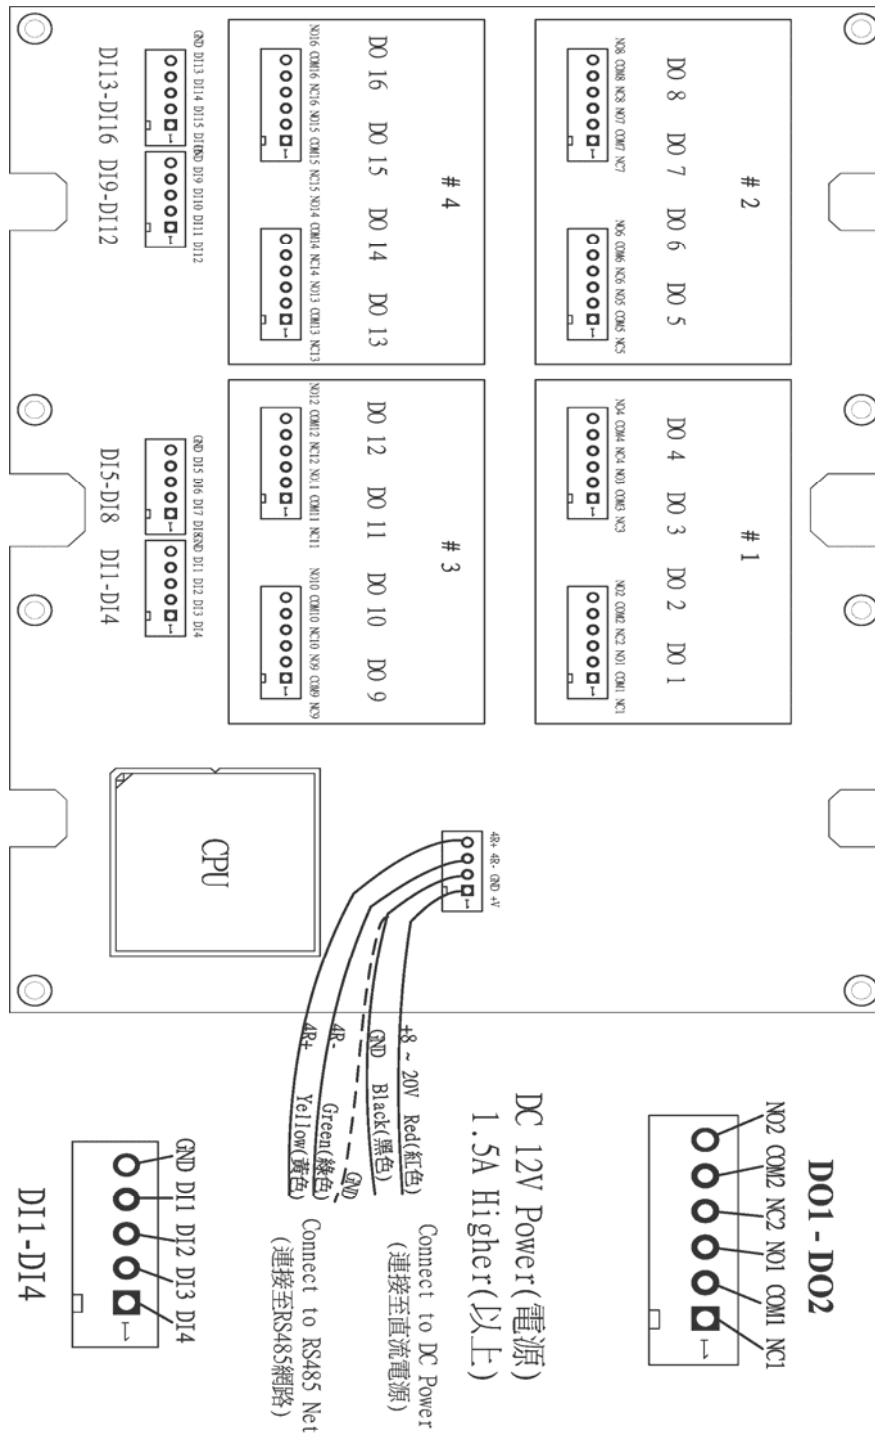

## MDDIDO-16 Specification

Items / Specs	MDDIDO-16
Interface	RS485 formats
Baud rate	19,200 bps (4,800、9,600、19,200、38,400、57,600、115,200)
ID	1 to 99
Input	16 voltage free
Output	16 relay output
Indicator	3 LED
Color	Beige
Operating temperature	-20°C to 70°C
Storage temperature	-30°C to 80°C
Power supply input	8V to 20V DC
Dimensions (mm)	107W x 138H x 30D

\* This specification is preliminary and is subject to change without prior notice.

