

MDREP-1 Install Guide

V01.00



SYRIS Technology Corp.

ADD : 12F, No. 12, Sec. 1, Taijunggang Rd.
Taichung, Taiwan (403)

TEL : +886-4-2207-8888

FAX : +886-4-2207-9999

E-Mail : service@syris.com

Website : <http://www.syris.com>

MDREP-1 Install Guide

V01.00



SYRIS Technology Corp.

ADD : 12F, No. 12, Sec. 1, Taijunggang Rd.
Taichung, Taiwan (403)


TEL : +886-4-2207-8888

FAX : +886-4-2207-9999

E-Mail : service@syris.com

Website : <http://www.syris.com>

MDREP-1 WIRING DIAGRAM

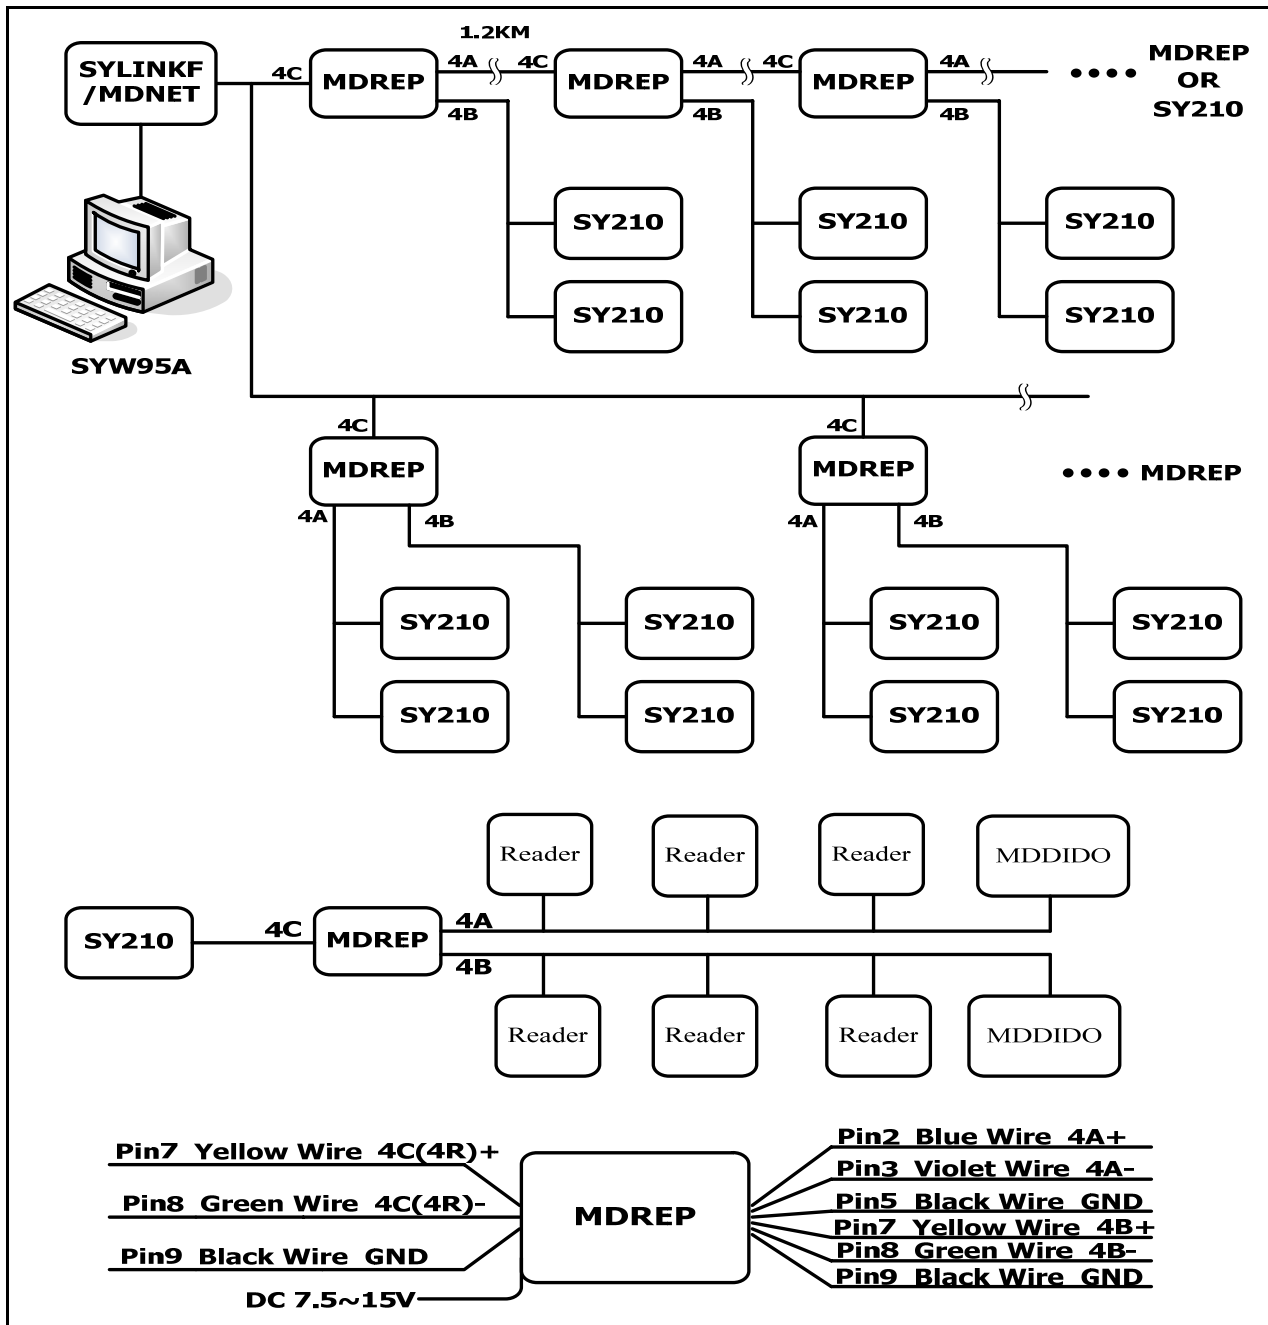


MDREP-1 Specification

Items / Specs	MDREP-1
Interface #1	USB V1.1
Interface #2	RS-232 formats
Interface #3	RS-485 formats * 3
Baud rate	19,200bps (4,800·9,600·19,200·38,400·57,600·115,200)
Beep	Built-in
Indicator	8 LED
Color	Beige
Humidity	10% to 95% (Non-condensing)
Operating temperature	-20°C to 70°C
Storage temperature	-30°C to 80°C
Power supply input	USB or 7.5V to 15V DC
Dimensions (mm)	110W x 136H x 32.5D

* This specification is preliminary and is subject to change without prior notice.

MDREP-1 WIRING DIAGRAM

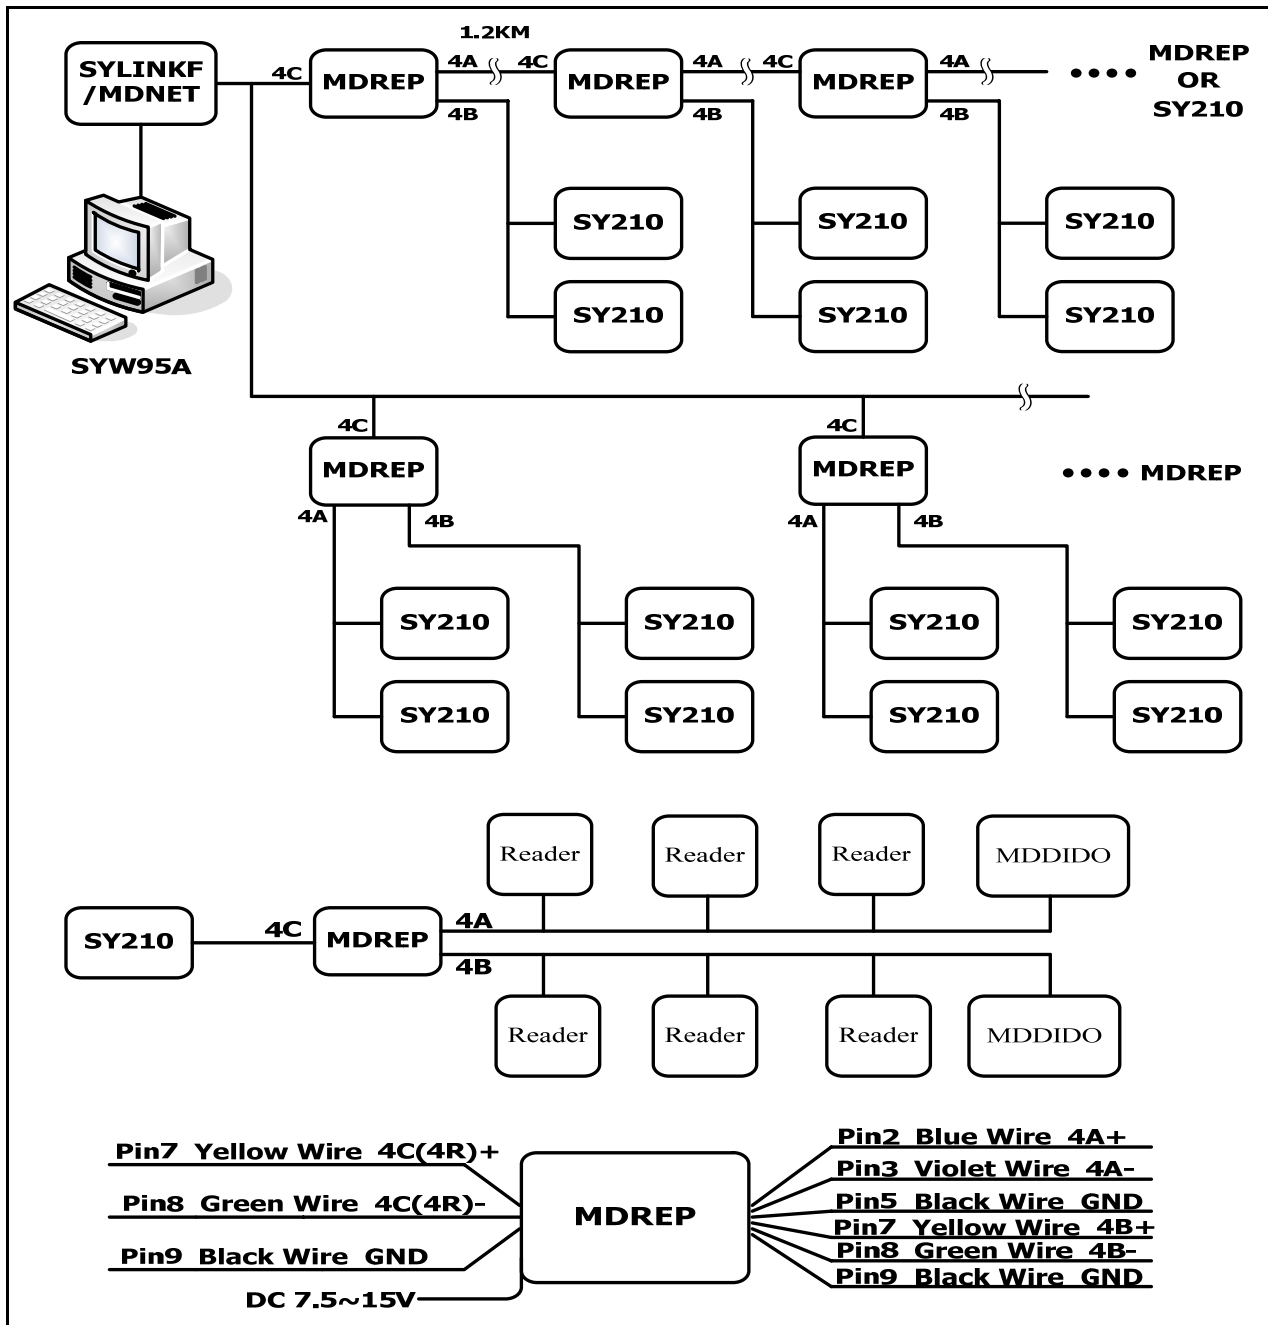

MDREP-1 Specification

Items / Specs	MDREP-1
Interface #1	USB V1.1
Interface #2	RS-232 formats
Interface #3	RS-485 formats * 3
Baud rate	19,200bps (4,800・9,600・19,200・38,400・57,600・115,200)
Beep	Built-in
Indicator	8 LED
Color	Beige
Humidity	10% to 95% (Non-condensing)
Operating temperature	-20°C to 70°C
Storage temperature	-30°C to 80°C
Power supply input	USB or 7.5V to 15V DC
Dimensions (mm)	110W x 136H x 32.5D

* This specification is preliminary and is subject to change without prior notice.