

Install and Operation Instructions SYLINK-R Module

USB/RS-232 to RS-485 Converter
Built-in 125K Reader
Baud rate 4,800-115,200 bps



SYRIS Technology Corp.

ADD : 21F-2, No. 12, Sec. 1, Taijunggang Rd.

Taichung, Taiwan (403)



TEL : +886-4-2207-8888

FAX : +886-4-2207-9999

E-Mail : service@syris.com

Website : <http://www.syris.com>

SYLINK-R WIRING DIAGRAM

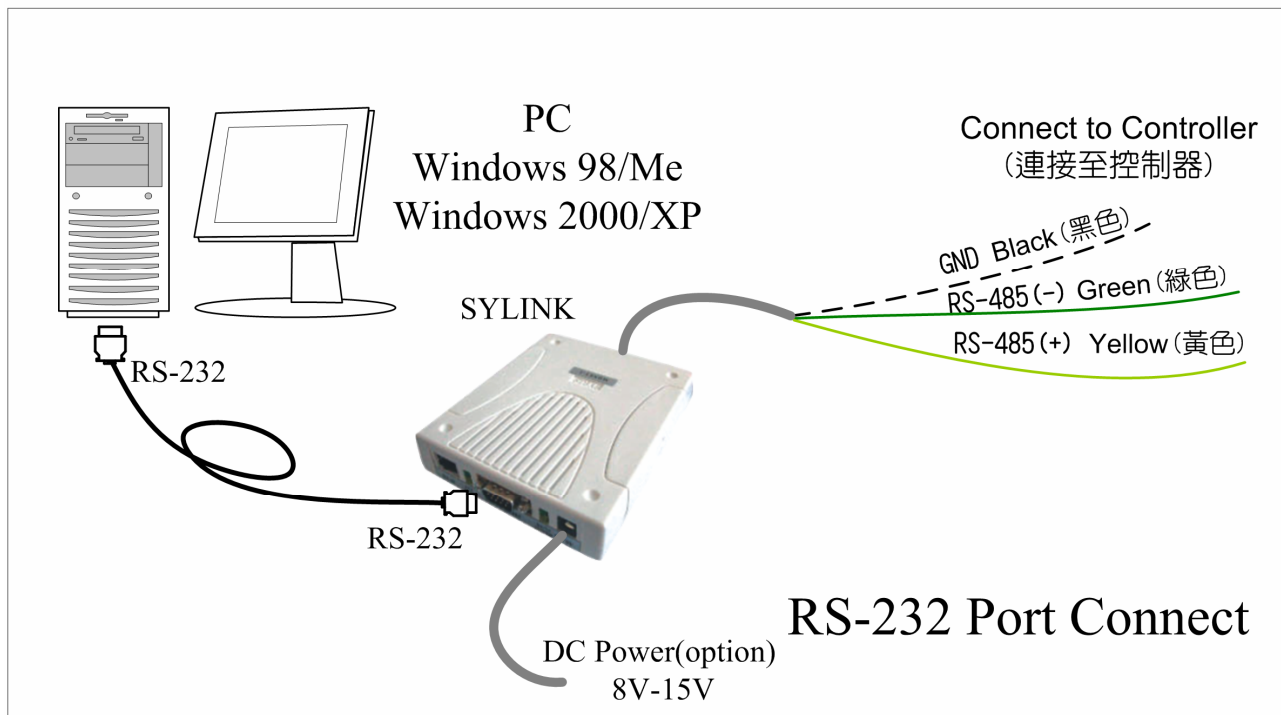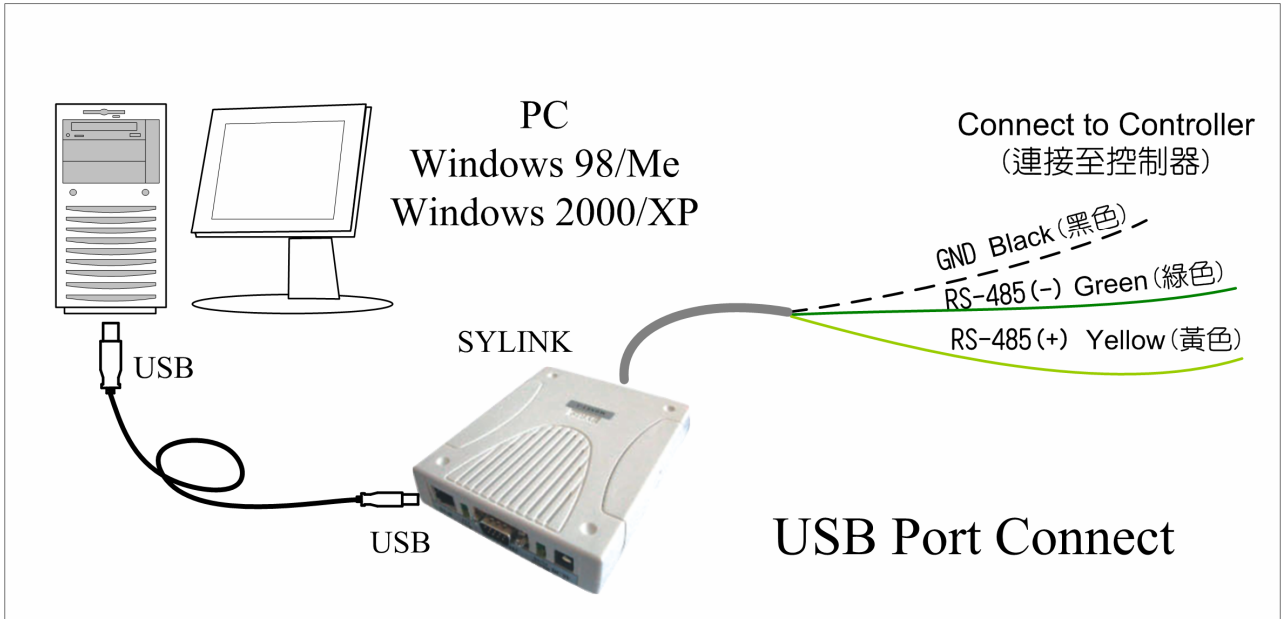

SYLINK-R Specification

Items / Specs	SYLINK-R
Interface #1	USB V1.1
Interface #2	RS-232 formats
Interface #3	RS-485 formats
Baud rate	19,200 bps (4,800、9,600、19,200、38,400、57,600、115,200)
Beep	Built-in
Indicator	8 LED
Software Data keypro	SYW95A + Built-in 125K Reader
Color	Beige
Humidity	10% to 95% (Non-condensing)
Operating temperature	-20°C to 70°C
Storage temperature	-30°C to 80°C
Power supply input	USB or 8V to 15V DC
Dimensions (mm)	107W x 138H x 30D

* This specification is preliminary and is subject to change without prior notice.