



SY260NT-V3F 2 door / 4 door New Type Controller

Install and Operation Instructions

SY260NT-V3F Serial Controller

Primary Advantages

- * Compact design
- * Competitive price
- * Quality Reliability
- * Brand Reputation
- * ACS expertise


Ver : 0110



SY260NT -V3F Serial Menu Struct

Items	Specs (Board/Case)	Items	Specs
Number of cards/records	6,000	Controller ID	1 - 9999
Number of cards holder name	2,000	Capacity of records	8,000
Number of readers	4 (2 In,2 Out) 、 8 (4 In,4Out)	Expand modules	SYRIS NT Serial module
Door control	2 / 4	Indicator	3 LED
Reader technologies	SYRIS RS485 format	Keypad input	16 key keypad
Baud rate	19,200 bps (4,800 ~ 115,200)	LCD display	16 x 2 LCD
Input Points	Normally 4 Expandable to 128	Speaker output	Speak 0.5 W
Control relay output	Normally 2 / 4 Expandable to 128	Anti-passback	Up to 3 level of local and/or group anti-passback
Support software	SYSOFT-95A/SYSOFT-95A -260 SYW95A-NET/SYW95A&V832.11	Extern reader module port	Mifare ,HID reader module(optional)
Communication ports	RS485, 2 Ports	Operating temperature	-20°C to 70°C
User P.I.N code	4 digital code	Storage temperature	-30°C to 80°C
Programmable time zone	60 time zones	Humidity	10% to 95 % (Non-condensing)
Group (application set)	64	Power supply input	8V to 24V DC
Dimensions (mm)	91W x 146H x 38D	Power consumption	0.3W to 3W

Login System

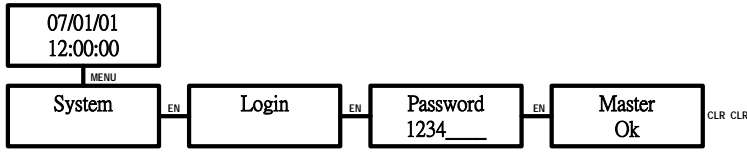

Key in password:1234

EN : Enter Key


▽ : Up Key

▲ : Down Key

CLR : Clear Key(Return)

MENU : Menu Key

Menu Struct

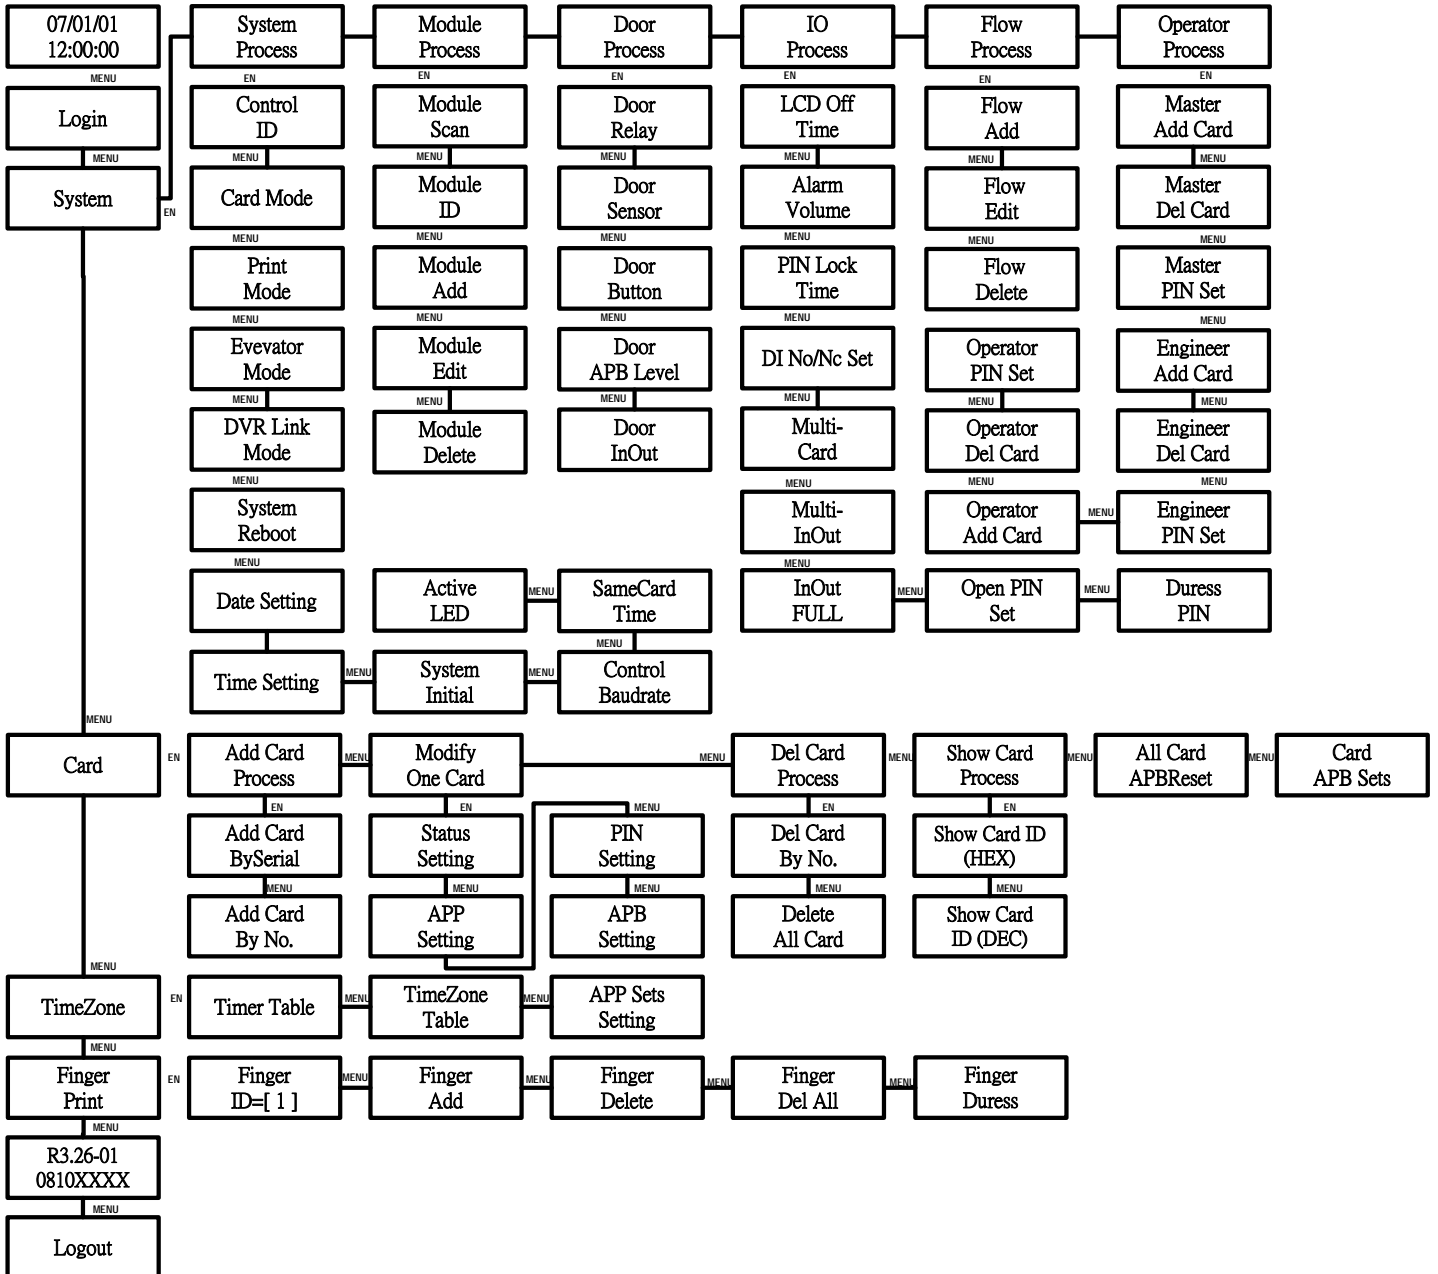

SYRIS SERIAL SY260NT-V3F CONTROLLER WIRING DIAGRAM 控制器接線圖

