

# Install and Operation Instructions SYRDU5 Serial Reader

USB and RS-232 Dual Interface  
Baud rate 4,800-115,200 bps



## **SYRIS Technology Corp.**

ADD : 12F, No. 12, Sec. 1, Taijunggang Rd.

Taichung, Taiwan (403)

TEL : +886-4-2207-8888

FAX : +886-4-2207-9999

E-Mail : [service@syris.com](mailto:service@syris.com)

Website : <http://www.syris.com>

# Install and Operation Instructions SYRDU5 Serial Reader

USB and RS-232 Dual Interface  
Baud rate 4,800-115,200 bps



## **SYRIS Technology Corp.**

ADD : 12F, No. 12, Sec. 1, Taijunggang Rd.

Taichung, Taiwan (403)



TEL : +886-4-2207-8888

FAX : +886-4-2207-9999

E-Mail : [service@syris.com](mailto:service@syris.com)

Website : <http://www.syris.com>

# SYRDU5 WIRING DIAGRAM

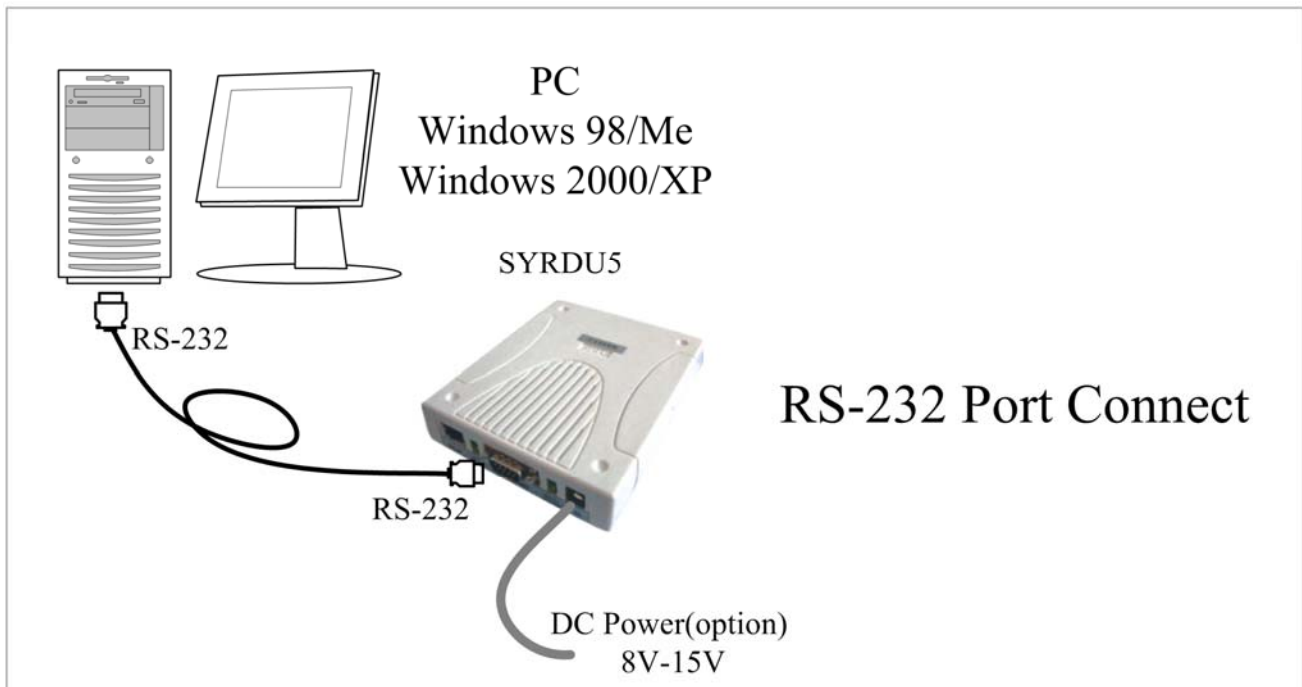
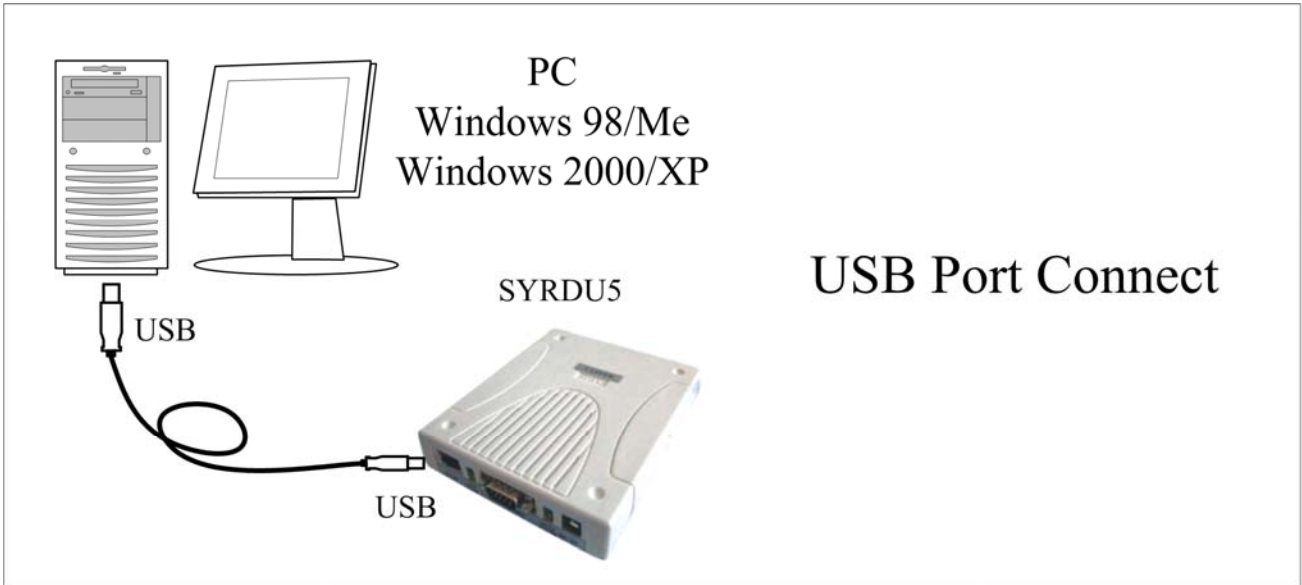


## SYRDU5 Specification

Items / Specs	SYRDU5
Frequency	125KHz
Card (Transponder)	SYRIS card (EM compatible)
Read range*	2cm ~ 10cm
Card read time	0.2sec(typical)
Interface #1	USB V1.1
Interface #2	RS-232 formats
Baud rate	19,200 bps (4,800、9,600、19,200、38,400、57,600、115,200)
Indicator	4 LED
Beep	Built-in
Color	Beige
Humidity	10% to 95% (Non-condensing)
Operating temperature	-20°C to 70°C
Storage temperature	-30°C to 80°C
Power supply input	USB or 8V to 15V DC
Dimensions (mm)	107W x 138H x 30D

\* This specification is preliminary and is subject to change without prior notice.

# SYRDU5 WIRING DIAGRAM

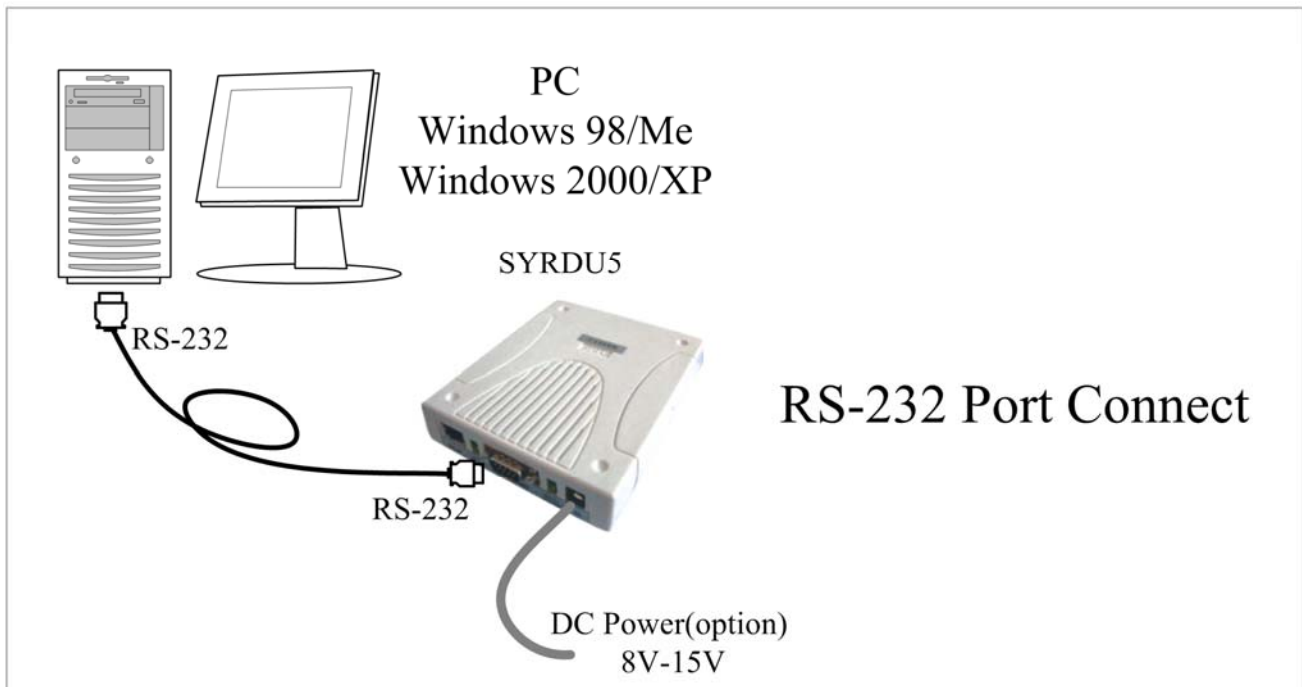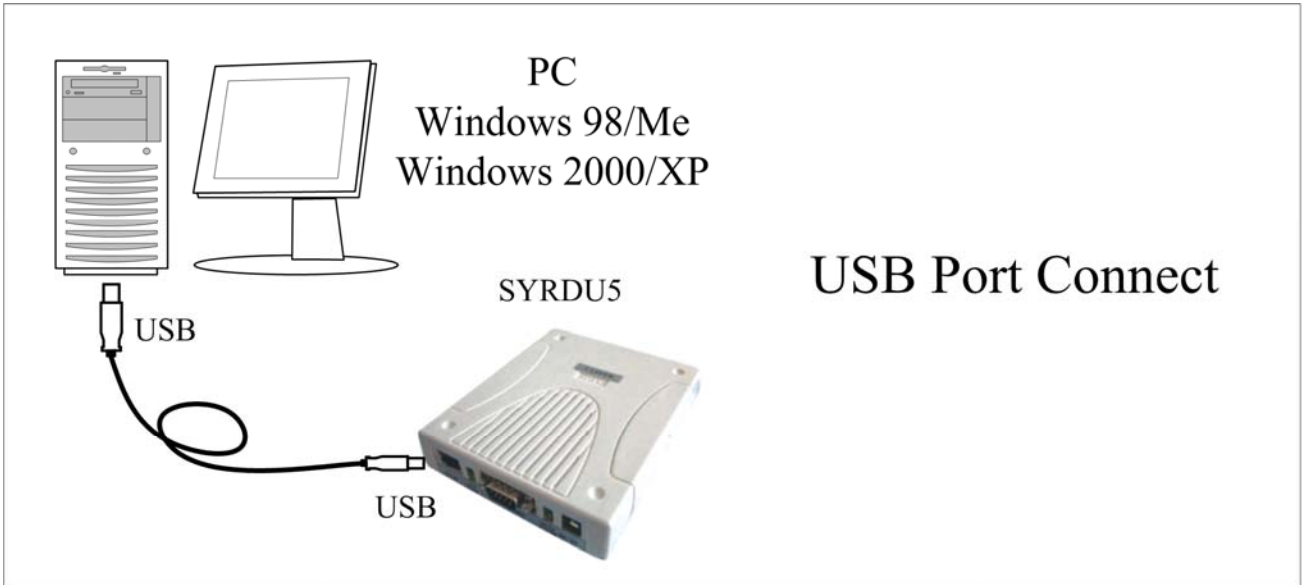

## SYRDU5 Specification

Items / Specs	SYRDU5
Frequency	125KHz
Card (Transponder)	SYRIS card (EM compatible)
Read range*	2cm ~ 10cm
Card read time	0.2sec(typical)
Interface #1	USB V1.1
Interface #2	RS-232 formats
Baud rate	19,200 bps (4,800、9,600、19,200、38,400、57,600、115,200)
Indicator	4 LED
Beep	Built-in
Color	Beige
Humidity	10% to 95% (Non-condensing)
Operating temperature	-20°C to 70°C
Storage temperature	-30°C to 80°C
Power supply input	USB or 8V to 15V DC
Dimensions (mm)	107W x 138H x 30D

\* This specification is preliminary and is subject to change without prior notice.